


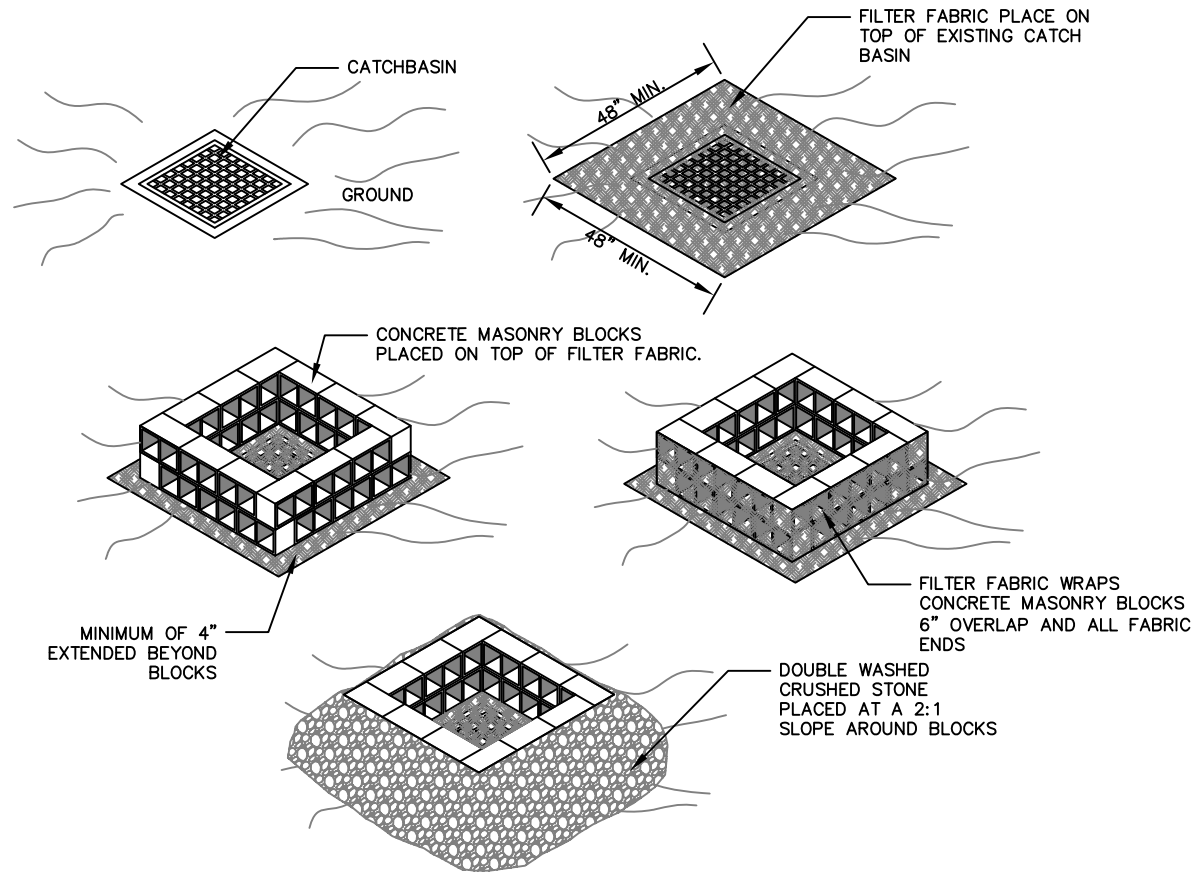

THIS METHOD OF INLET PROTECTION IS APPLICABLE WHERE HEAVY FLOWS ARE ANTICIPATED AND OVERFLOW CAPACITY IS NECESSARY TO PREVENT EXCESSIVE PONDING

INSPECTION SCHEDULE SHALL COMPLY WITH THE 2008 EPA CONSTRUCTION GENERAL PERMIT

MAINTENANCE SHALL OCCUR WHEN NECESSARY. FILTER FABRIC SHALL BE SWEEPED CLEAN WHEN NEEDED AND GRAVEL SHALL BE REPLACED WHEN A NOTICEABLE AMOUNT OF FINES HAVE COLLECTED IN BETWEEN THE CRUSHED GRAVEL.

CATCH BASIN W/ BLOCK AND GRAVEL INLET PROTECTION



INLET PROTECTION 1

CITY OF CAMBRIDGE STANDARD SPECIFICATIONS AND DETAILS

SCALE: N.T.S.

DATE OF ISSUE: 07/09

SPEC. SECTION REF#: