


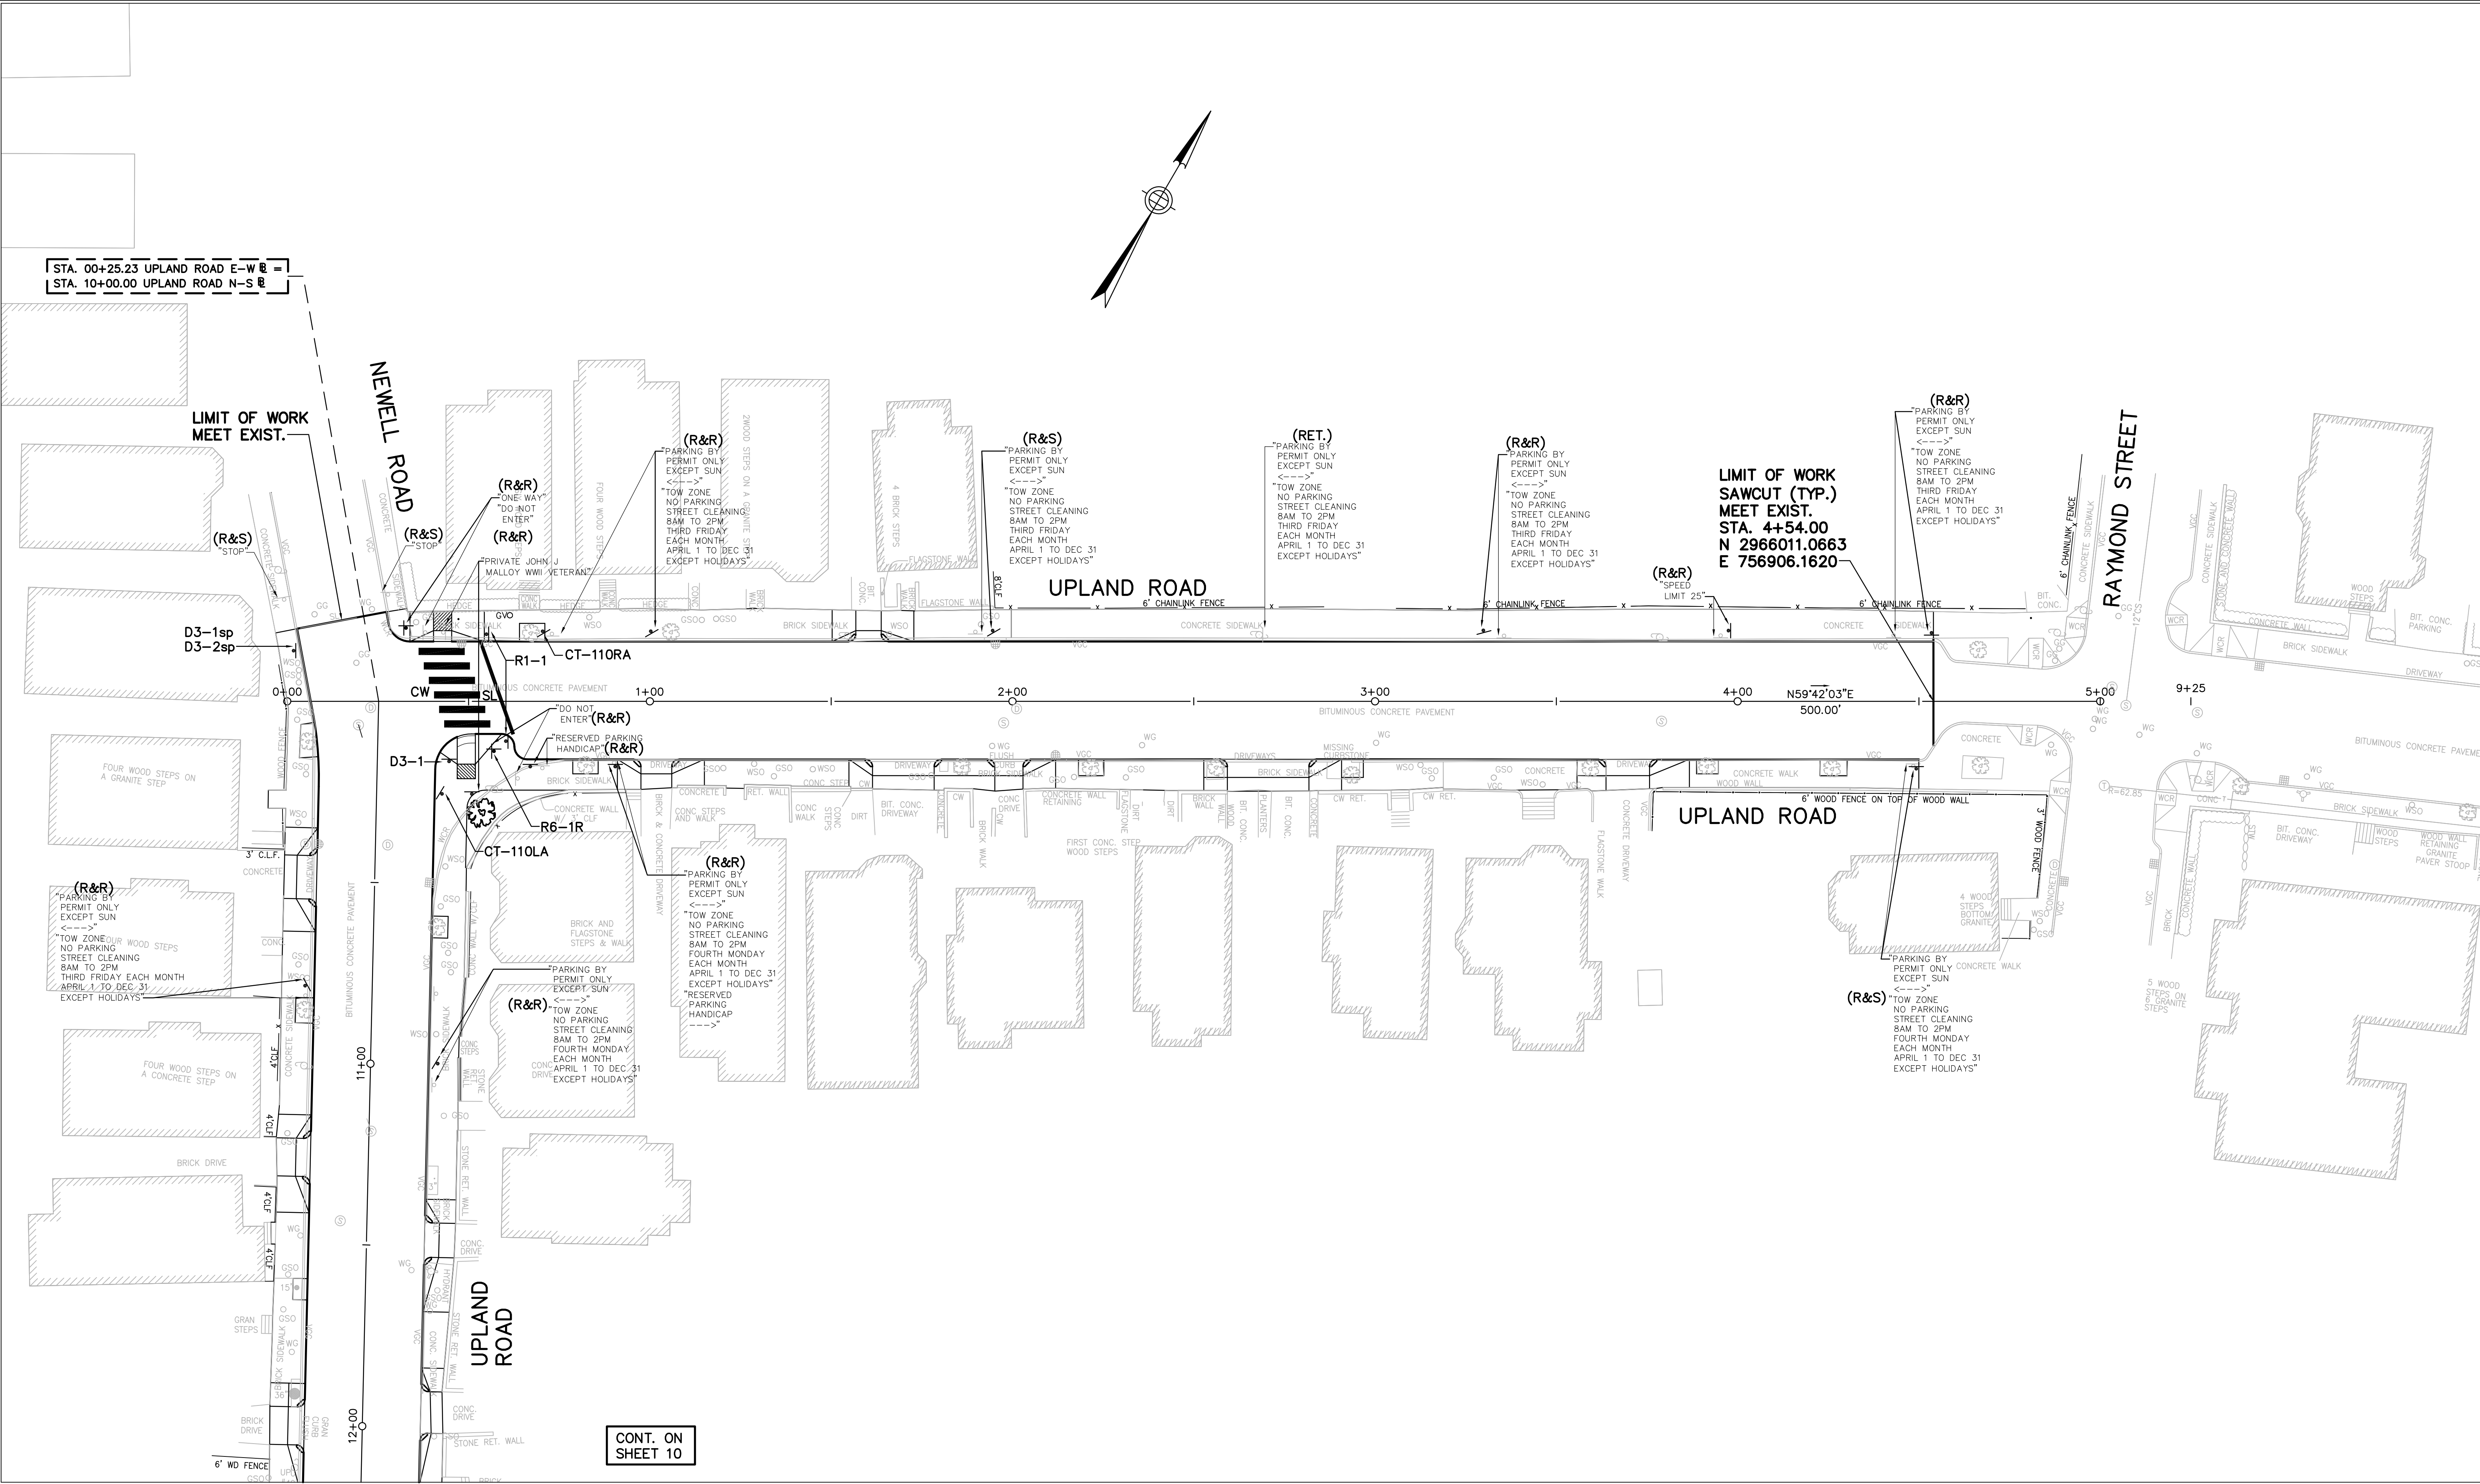

GRAPHIC SCALE

0 10 20 30 40 60 FEET

PAVEMENT MARKING & SIGNING PLAN

UPLAND ROAD
CAMBRIDGE, MASSACHUSETTS

PROJECT:
ROADWAY & SIDEWALK IMPROVEMENTS
UPLAND ROAD
CAMBRIDGE, MASSACHUSETTS



PREPARED FOR:
Community Development Department
344 Broadway
Cambridge, Massachusetts 02139

GPI Greenman-Pedersen, Inc.

Engineers, Architects, Planners, Construction Engineers & Inspectors

105 Central Street, Suite 4100, Stoneham, MA 02180, Tel. (781)279-5500
61 Spit Brook Road, Suite 110, Nashua NH 03060, Tel. (603) 891-2216
800 South Main Street, 1st Floor, Mansfield MA 02048, Tel. (508) 339-9350
Other Offices In: FL, MD, MI, NJ, NY, OH, PA, VA, VT, WA <http://www.gpinet.com>


NO.	REVISION	DATE	DESIGN/DRAWN BY: TQN
			CHECK BY: JWD/MDE
			DATE: 08/01/2009
			SCALE: AS NOTED
			JOB NO.: MAX-2007080.01
			FILE NAME: 07080_PM
			DRAWING NO.: 9 OF 13

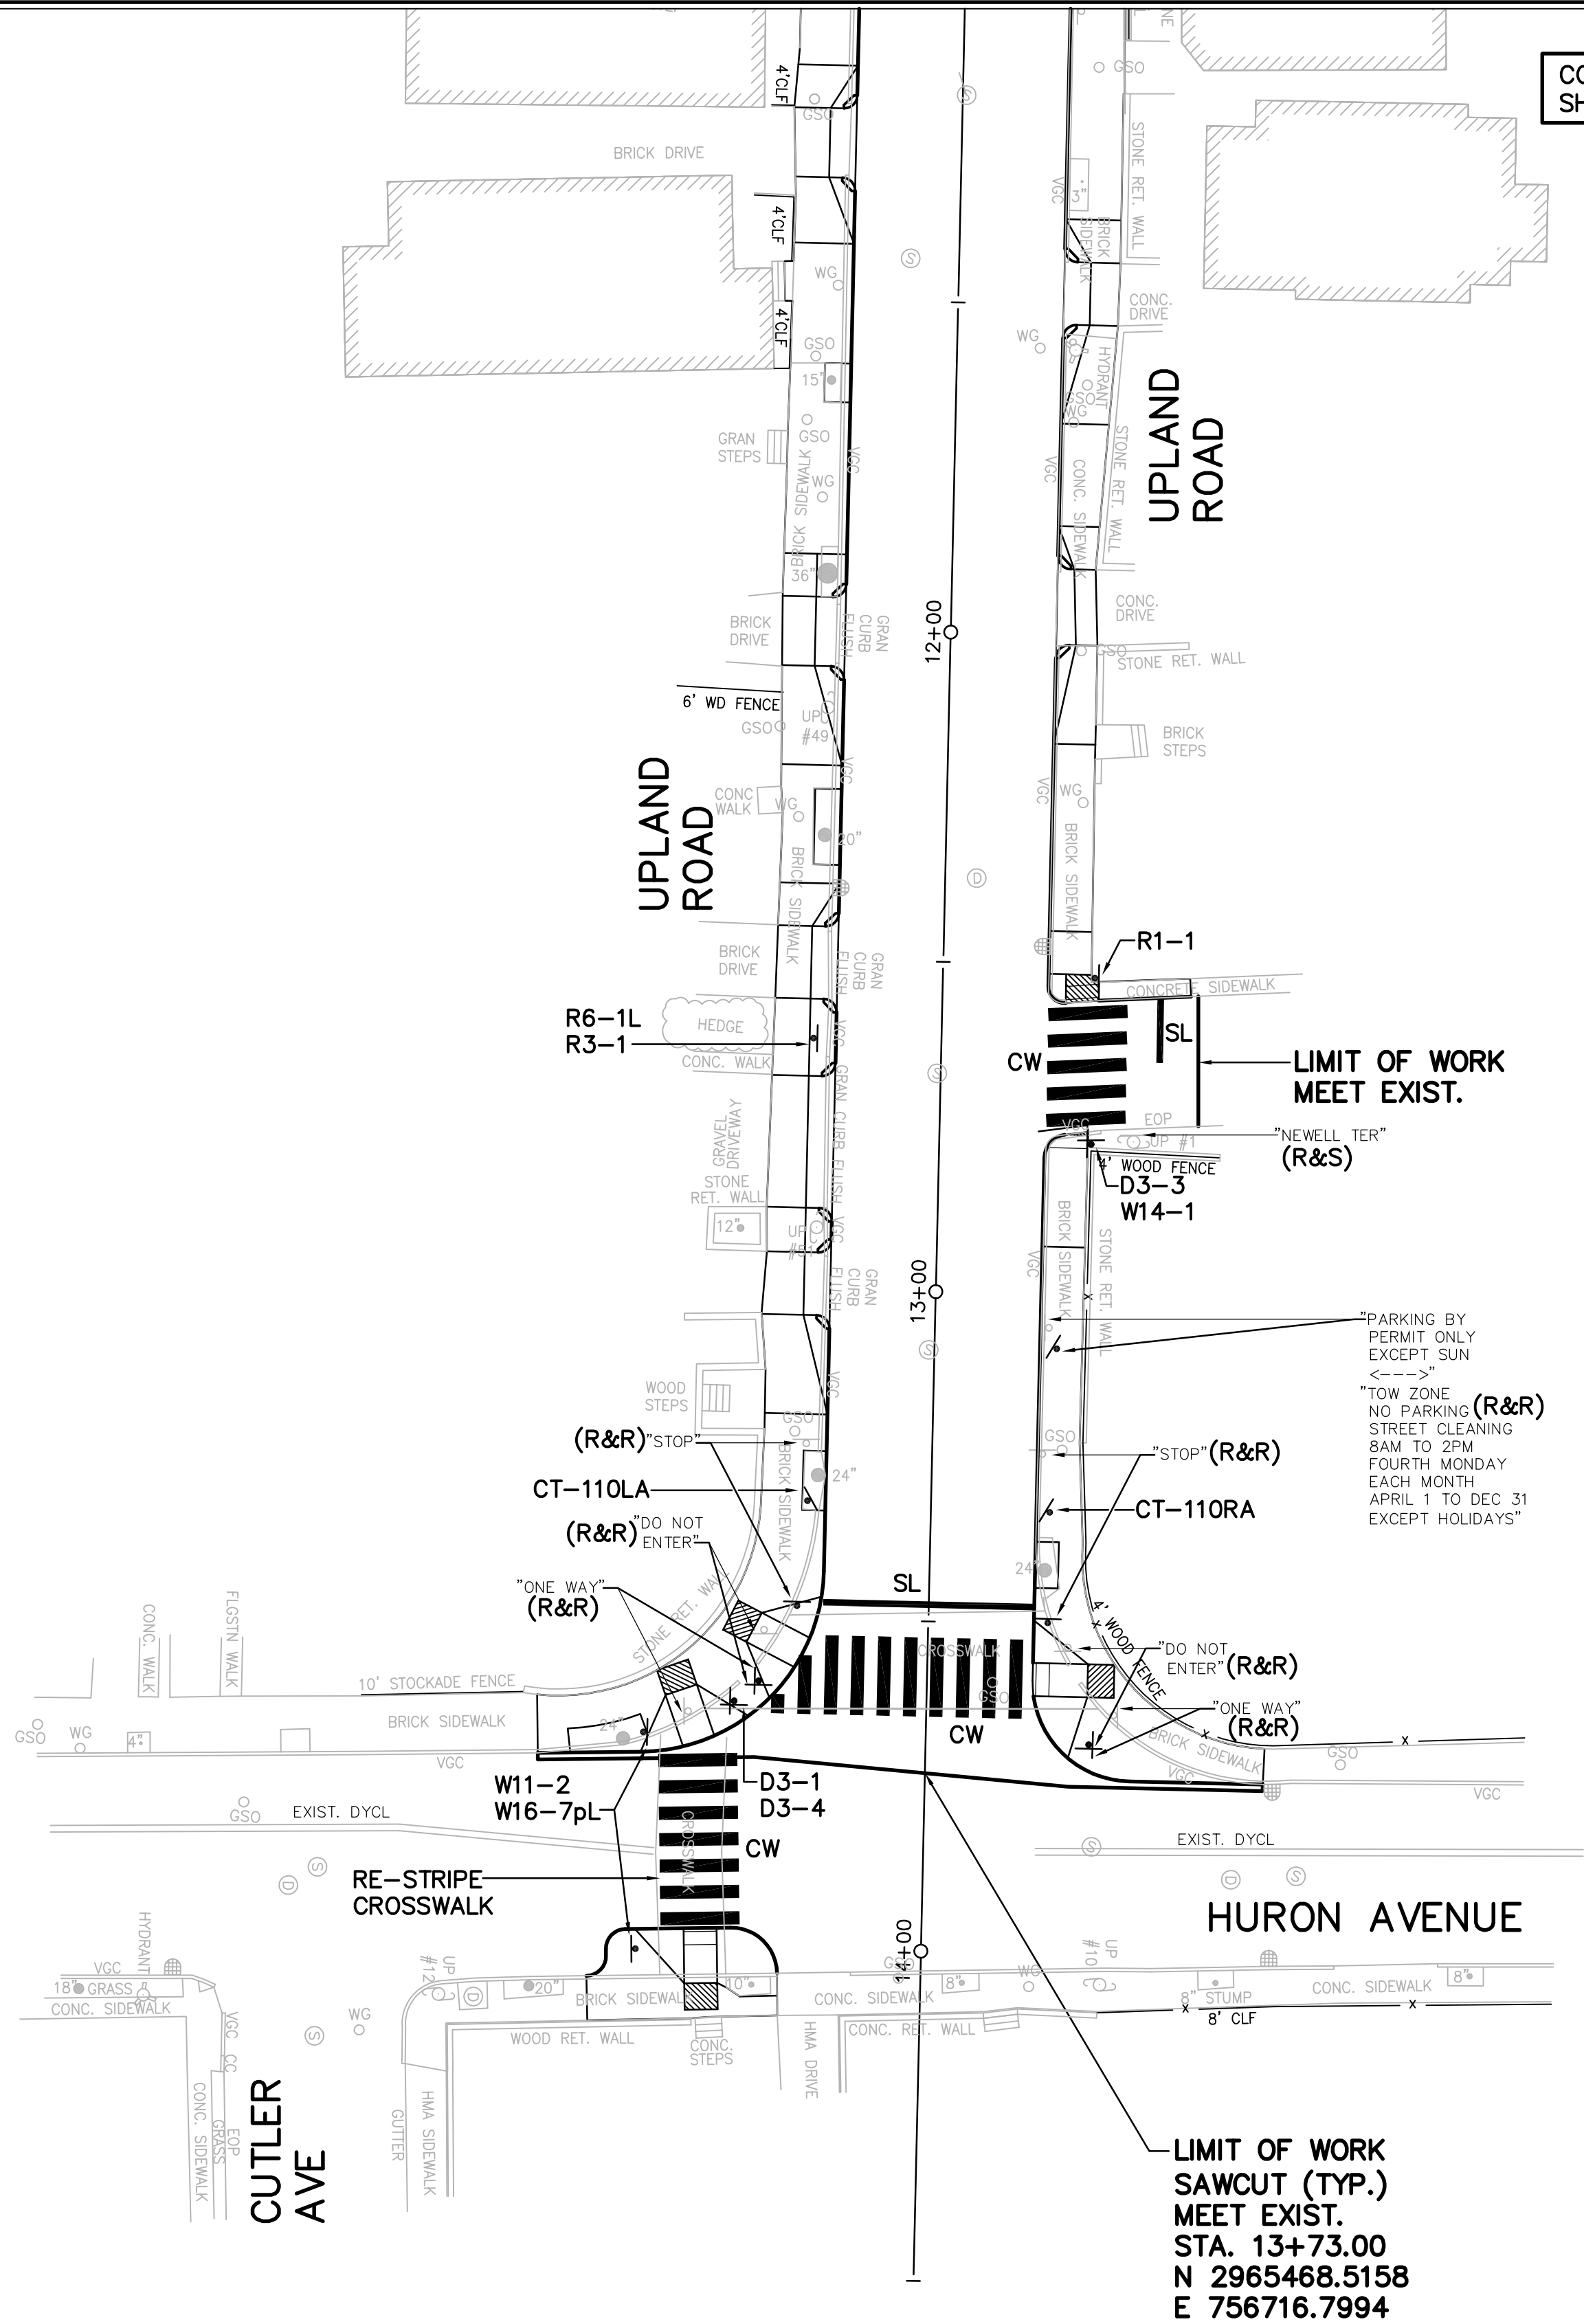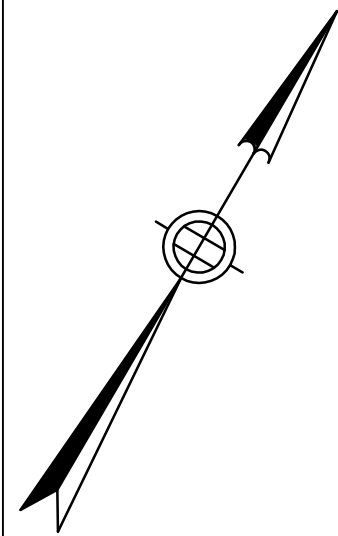

CONT. ON
SHEET 9

IDENTIFI- CATION NUMBER	SIZE OF SIGN		TEXT	TEXT DIMENSIONS (INCHES)		NUMBER OF SIGNS REQUIRED	COLOR			POST SIZE AND NUMBER REQUIRED	UNIT AREA IN SQUARE FEET	AREA IN SQUARE FEET
	WIDTH	HEIGHT		LETTER HEIGHT	VERTICAL SPACING		BACK- GROUND	LEGEND	BORDER			
R1-1	30"	30"		MUTCD STANDARD		3	MUTCD STANDARD			P5 (3 REQ'D)	6.25	18.75
R3-1	24"	24"		MUTCD STANDARD		1	MUTCD STANDARD			MNT w/R6-1L	4.00	4.00
R6-1L	36"	12"		MUTCD STANDARD		1	MUTCD STANDARD			P5 (1 REQ'D)	3.00	3.00
R6-1R	36"	12"		MUTCD STANDARD		1	MUTCD STANDARD			P5 (1 REQ'D)	3.00	6.00
W11-2	30"	30"		MUTCD STANDARD		2	MUTCD STANDARD			P5 (2 REQ'D)	6.25	12.50
W16-7pL	24"	12"		MUTCD STANDARD		2	MUTCD STANDARD			MNT w/W11-2	2.00	4.00
W14-1	30"	30"		MUTCD STANDARD		1	MUTCD STANDARD			MNT w/D3-3	6.25	6.25
CT-110LA	12"	18"		CITY OF CAMBRIDGE STANDARD		2	CITY OF CAMBRIDGE STANDARD			P5 (2 REQ'D)	1.50	3.00
CT-110RA	12"	18"		CITY OF CAMBRIDGE STANDARD		2	CITY OF CAMBRIDGE STANDARD			P5 (2 REQ'D)	1.50	3.00
D3-1	VAR.	12"		6"C/4"C	3" 3"	2	MUTCD STANDARD			P5 (2 REQ'D)	PAY UNDER ITEM 874.	
D3-1sp	VAR.	12"		6"C/4"C 1.5"x6" ARROW	3" 3"	1	MUTCD STANDARD			P5 (1 REQ'D)	PAY UNDER ITEM 874.	
D3-2sp	VAR.	12"		6"C/4"C 1.5"x6" ARROW	3" 3"	1	MUTCD STANDARD			MNT w/D3-1sp	PAY UNDER ITEM 874.	
D3-3	VAR.	12"		6"C/4"C	3" 3"	1	MUTCD STANDARD			P5 (1 REQ'D)	PAY UNDER ITEM 874.	
D3-4	VAR.	12"		6"C/4"C	3" 3"	1	MUTCD STANDARD			MNT w/D3-1	PAY UNDER ITEM 874.	

- NOTES:
1. ALL WARNING, REGULATORY AND ROUTE MARKERS SHALL BE FABRICATED WITH HIGH INTENSITY ENCAPSULATED LENS REFLECTIVE SHEETING (SEE SECTION M9.30.0) TYPE III OR IV.
 2. ALL SIGNS NOTED AS "(R&R)" SHALL BE MOUNTED ON NEW P5 POSTS OR AS OTHERWISE INDICATED.
 3. ALL P5 POSTS SHALL BE TELESCOPIC SQUARE TYPE POSTS.
 4. QUANTITIES OF SIGNS AND POSTS SHOWN ON THIS SHEET MAY DIFFER FROM THE PAVEMENT MARKING AND SIGNING PLANS. WHERE DIFFERENCES OCCUR, THE PAVEMENT MARKINGS AND SIGNING PLANS SHALL PREVAIL.

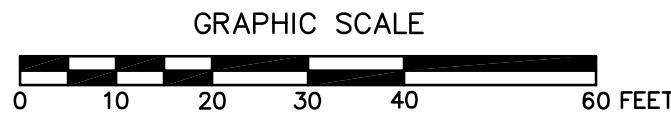

PAVEMENT MARKING & SIGNING PLAN

UPLAND ROAD
CAMBRIDGE, MASSACHUSETTS

PROJECT: **ROADWAY & SIDEWALK IMPROVEMENTS**
UPLAND ROAD
CAMBRIDGE, MASSACHUSETTS

PREPARED FOR: **Community Development Department**
344 Broadway
Cambridge, Massachusetts 02139



Greenman-Pedersen, Inc.

Engineers, Architects, Planners, Construction Engineers & Inspectors

105 Central Street, Suite 4100, Stoneham, MA 02180, Tel. (781)279-5500
61 Spit Brook Road, Suite 110, Nashua NH 03060, Tel. (603) 891-2216
800 South Main Street, 1st Floor, Mansfield MA 02048, Tel. (508) 339-9350
Other Offices In: FL, MD, MI, NJ, NY, OH, PA, VA, VT, WA <http://www.gpinet.com>

NO.	REVISION	DATE	DESIGN/DRAWN BY: TQN
			CHECK BY: JWD/MDE
			DATE: 08/01/2009
			SCALE: AS NOTED
			JOB NO.: MAX-2007080.01
			FILE NAME: 07080_PM
			DRAWING NO.: 10 OF 13