


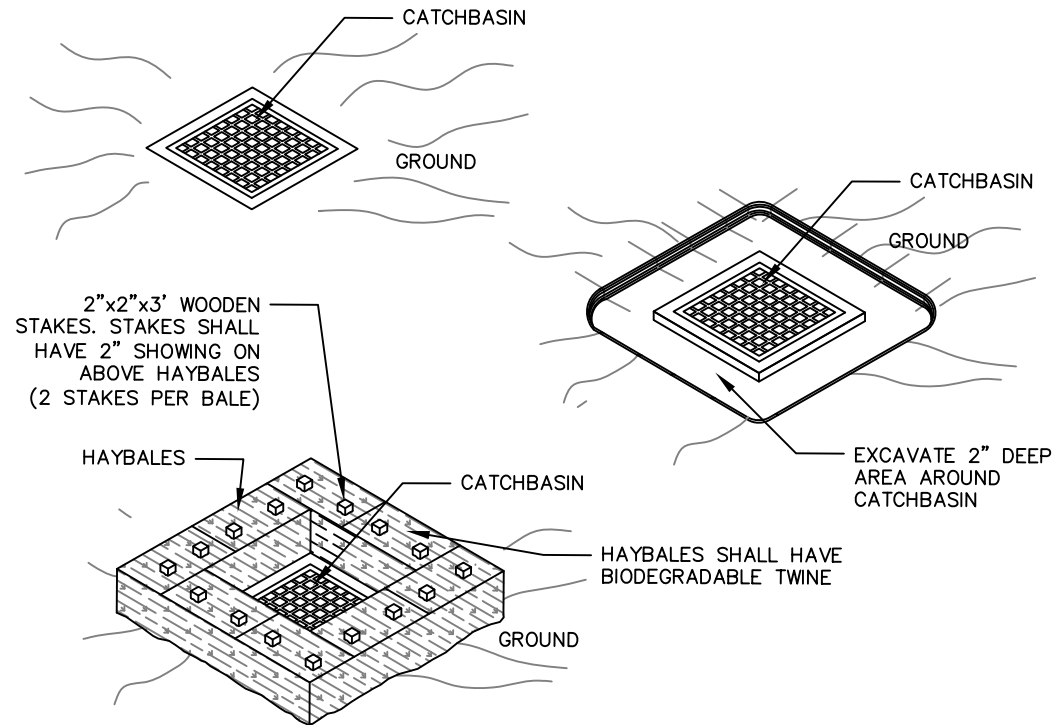

INSPECTION SCHEDULE SHALL COMPLY WITH THE 2008 EPA CONSTRUCTION GENERAL PERMIT
THIS METHOD OF INLET PROTECTION IS APPLICABLE WHERE THE INLET DRAINS A RELATIVELY FLAT
AREA (SLOPE NO GREATER THAN 5%). WHERE THE INLET ACCEPTS SHEET OR OVERLAND FLOWS
(NOT GREATER THAN 1 CFS). THIS METHOD SHOULD NOT APPLY TO AN INLET ACCEPTING
CONCENTRATED FLOW.

HAYBALES SHOULD BE MADE FROM REGIONALLY FARMED HAY TO REDUCE THE POSSIBILITY OF
INVASIVE SPECIES. WHEN POSSIBLE STRAW BALES SHOULD BE USED.

HAYBALES SHOULD ONLY BE USED WHEN APPROVED BY THE CITY OF CAMBRIDGE. HAYBALES ARE
ALLOWS FOR PROJECTS THAT HAVE A DURATION OF LESS THAN THREE MONTHS.

MAINTENANCE SHALL OCCUR WHEN NECESSARY. HAYBALES ARE HIGHLY IMPERVIOUS AND THE
CONTRACTOR SHOULD EXPECT PONDING IN THE AREA. HAYBALES SHOULD BE REPLACED EVERY 1
TO 3 MONTHS DEPENDING ON CONDITIONS.

CATCH BASIN W/ HAYBALES INLET PROTECTION



INLET PROTECTION 3

CITY OF CAMBRIDGE STANDARD SPECIFICATIONS AND DETAILS

SCALE: N.T.S.

DATE
OF ISSUE: 07/09

SPEC. SECTION REF#: